12. CHANGING THE IP ADDRESS

The Siemens LOGO! control unit and the text display must be changed separately.

Factory default setting:

Siemens LOGO!

LOGO IP 192.168.000.231
Subnet mask 255.255.255.000

No message for the character set

- Press the down arrow key ▼.
- Press ESC as soon as the time and date appear on the display.

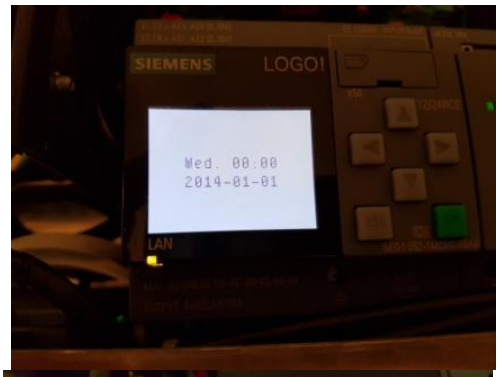

- Before the IP address can be changed, the Siemens LOGO! program must be stopped. Select "Stop" with the arrow keys ▼▲ and confirm with "**OK**".

-

The program must now be stopped using the arrow keys ► ◄ Select Yes and confirm with "**OK**"

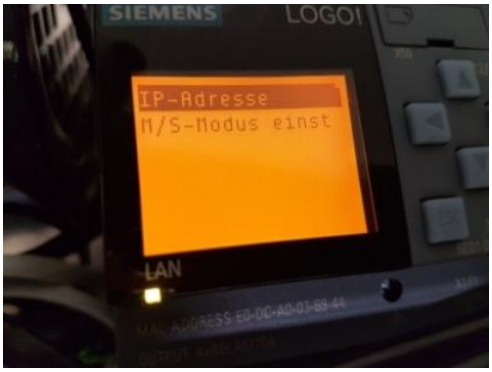

Once the Siemens LOGO! IP address has been changed, the IP address for the text display must be changed. The IP addresses must not be identical but consecutive.

- Use the arrow keys ▲▼ to select TDE Settings and confirm with **OK**.

- Use the arrow keys ▼▲ to select Network and confirm with **OK**.
- Then select the IP address and confirm with **OK**.

- Logo! Selection Enter/OK
- Change IP address to that of Logo! display – confirm with Enter
- ESC
- Start program sequence again on Logo! display
- ▼
- Network
- IP address LOGO 231
- IP address Text Display 232

Default settings:

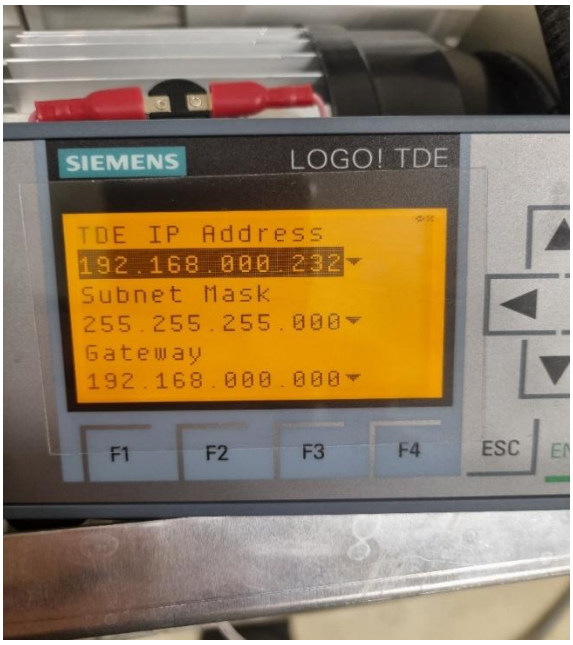

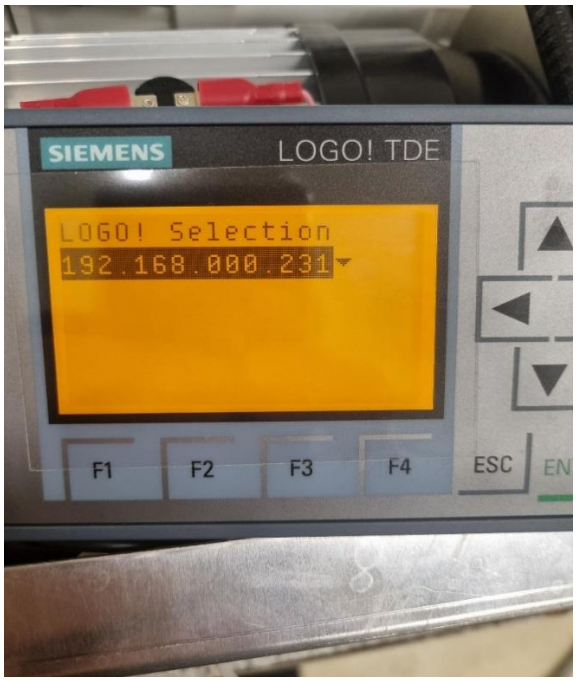
SIEMENS
LOGO! TDE
LOGO! Selection
192.168.000.231
F1
F2
F3
F4
ESC