



henndrixx®

foxxboxx®

COLD NEBULISER ROOM DISINFECTION



easymetal GmbH Resselstrasse 12 A-2120 Wolkersdorf AUSTRIA

Phone: +43 2245 20 123 Fax: +43 2245 20 123 45 E-Mail: office@easymetal.com









ACTIVE AGAINST Corona (SARS-COV-2)

- ✓ pH-neutral
- ✓ alcohol-free
- ✓ aldehyde-free
- ✓ phenol-free



Highly effective against Viruses, bacteria, mould and germs.


foxxboxx® cold nebuliser with henndrixx® disinfectant.

The ultra-fine dry fog nozzles of the foxxboxx® cold nebuliser produce the finest, non-wetting dry fog. The mist penetrates into the smallest cracks and disinfects the room air and objects very effectively without leaving any wet residue.

The henndrixx® dry mist is pH-neutral, gentle on the skin and completely free of incompatible additives.





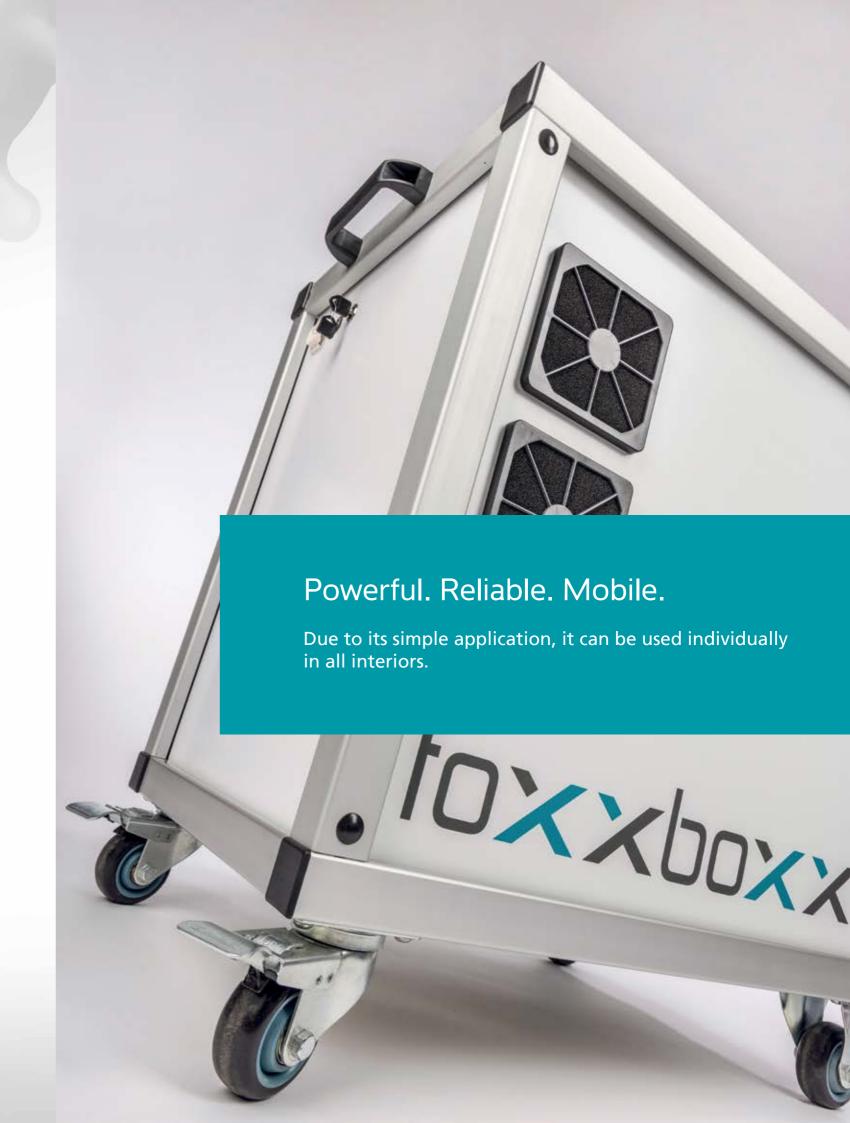



Your advantages:

- ✓ Effectively disinfects the room air
- ✓ Works on all surfaces
- Eliminates unpleasant odors
- ✓ Also disinfects hard-to-reach areas
- ✓ No wiping required



Gentle on electronic devices.

Conveniently controllable via mobile phone or tablet.

With the foxxboxx®'s own WLAN, you always have full control over the fogging process.



Eliminates unpleasant odors.

Areas of application

- ✓ Medical practices, therapy rooms, retirement and nursing homes
- ✓ Waiting areas, seminar & meeting rooms



- ✓ Schools & Kindergartens
- ✓ Sports facilities & event halls, sanitary rooms
- ✓ Snack huts & gastronomy
- ect.

foxxboxx®







Elektrical connection	
Power consumption	600 W
Voltage	230 V AC/50 Hz

Performance	
Nebulisation capacity	20 m³/minute
Mist ejection height	189 cm
Tank capacity	28 liters
Consumption	max. 6 liters for 60 minutes

System data	
Weight, empty	approx. 35 kg
Dimensions (L/W/H)	680/480/730 mm



Elektrical connection	
Power consumption	300 W
Voltage	230 V AC/50 Hz

Performance	
Nebulisation capacity	10 m³/minute
Mist ejection height	110 cm
Tank capacity	15 liters
Consumption	max. 3 liters for 60 minutes

System data	
Weight, empty	approx 17 kg
Dimensions (L/W/H)	335/440/620 mm



Elektrical connection	
Power consumption	90 W
Voltage	100 - 240 50/60 Hz

Performance	
Effective range	50-100 m³
Mist volume regulator	4-stage (25 m³, 50 m³, 75 m³, 100 m³)
Tank capacity	13 liters
Consumption	max. 1,2 liters for 60 minutes

System data	
Weight, empty	approx. 3,6 kg
Dimensions (L/W/H)	294/194/503 mm