

Series

EASYFILL

EASYFILL

INNOVATIVE AND RELIABLE

Whether as basis for cooling lubricant in milling, grinding and turning, or as EASY refill system for your eroding machine, the EASYFILL series was specifically developed for your water demand. Space saving and easy to handle, the efficient EASYFILL produces guaranteed optimal treated water for your machines. Residues and odor formation in the water are reduced to a minimum.

FLEXIBILITY AND COMFORT

From basic to L, the flexible sizes of the EASYFILL refilling system provide individuality for all water requirements. The EASYFILL module even serves as an automatic refill system depending on machine used. Whether centralized or decentralized, the quick installation of the EASYFILL module guarantees purest water and ensures a low-maintenance operation for many years to come.

EASYBOTT

EFFORTLESSLY MOBILE

As a mobile water dispenser, the EASYBOTT is the ideal supplement to your EASYFILL. Its practical pressure tank with integrated pressure indicator automatically fills the tank of your machine without pump or complex power supply. Its rollers suitable for industrial applications create mobility and comfort. The extraordinary small footprint makes this unit the ideal equipment to fill your machines quickly and easily.



EASYRO®

EASYFILL

BASIC



Control unit with display

STANDARD



Control unit with display

LARGE



ELECTRICAL CONNECTION	BASIC	STANDARD	LARGE
System	EASYRO 150	EASYRO 300	EASYRO 600
Power draw	250 W	250 W	600 W
Voltage	230V AC/50 Hz	230V AC/50 Hz	230V AC/50 Hz
Noise level	>60 dB(A)	>60 dB(A)	>60 dB(A)

WATER CONNECTION

Line requirement	10 l/min	15 l/min	20 l/min
Line pressure	2-6 bar	2-6 bar	2-6 bar
Unit connection	3/4" outer thread	3/4" outer thread	3/4" outer thread
Waste water connection	JG 10/DN 20	JG 10/DN 20	JG 10/DN 20

HYDRAULIC CAPACITY

Capacity (24-hrs) at 15 °C	2400 L	4800 L	9600 L
Output pressure adjustable	1-5,5 bar	1-5,5 bar	1-5,5 bar
EASYBOTT add-on	incl.	incl.	incl.

SYSTEM DATA

Wall panel incl. prefilter	YES	YES	YES
Desalination rate min.	95%	95%	95%
Waste water* min.	25%	25%	25%
Drains	2 x JG 10	2 x JG 10	2 x JG 10
Drain 1	Supply water, fixed		
Drain 2	Adjustable 0-200 µS/cm ¹		
Weight, empty	Approx. 16 kg	Approx. 20 kg	Approx. 40 kg
Dimensions (H/D/W)	140/450/490mm	280/450/490mm	560/450/490mm

* Depending on the raw water quality and membrane service life.

STANDARD EQUIPMENT

EASYBOTT Interface	1	1	1
Extraction set	1	1	1



EASYBOTT

SYSTEM DATA

Drains	2 x CPC
Weight, empty	Approx. 45 kg
Weight, incl. fill	Approx. 85 kg
Dimensions (H/D/W)	1210/660/370mm
Content	Approx. 40 L
Pressure pump and valve	incl.

STANDARD EQUIPMENT

Tube set	1
----------	---

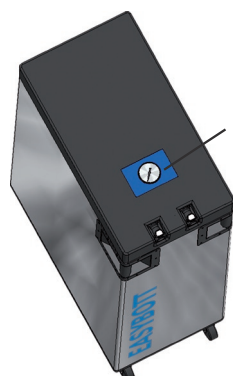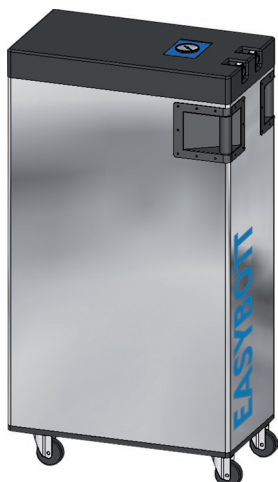

Pressure indicator/ fill level

Subject to technical modifications.

easy metal GmbH
prozesstechnik

www.easymetal.com